

CONTINUOUS CURBING | BIG BOLLARD™



15" DIAMETER, THE LARGEST CIRCUMFERENCE REBOUNDABLE BOLLARD

The QWICK KURB® Continuous Curbing System with BIG BOLLARD Markers is a MASH Longitudinal Channelizing System ideal for harsh environments such as narrow medians and work zones. Large formidable delineators on top of a raised continuous curb clearly define the intended travel path and increases motorist compliance while providing superior channelization in all weather conditions, even snow.

BIG BOLLARD™ L125SHM MARKER

The QWICK KURB BIG BOLLARD Marker is the largest reboundable bollard on the market with a 15" circumference. It addresses the need for high target vertical elements.


This unique two-part vertical, with rebounding boot support, allows installation of extra large markers.

CONTINUOUS CURBING

QWICK KURB Continuous Curbing is designed to interlock together similar to concrete barrier wall. In addition, a heavy duty hook is molded directly into the element to strengthen the system laterally. Anchors can also be added for long-term installations. The two-tier profile is designed to keep curbing stationary during run overs. QWICK KURB Continuous Curbing can be installed in curves as tight as 38 feet in diameter.

The QWICK KURB Continuous Curbing System with BIG BOLLARD Markers meets eligibility requirements based on AASHTO MASH criteria as a TL-3 Longitudinal Channelizer. The system can be installed fully anchored, semi-anchored or in some work zone applications, unanchored.

CONTINUOUS CURBING | BIG BOLLARD™

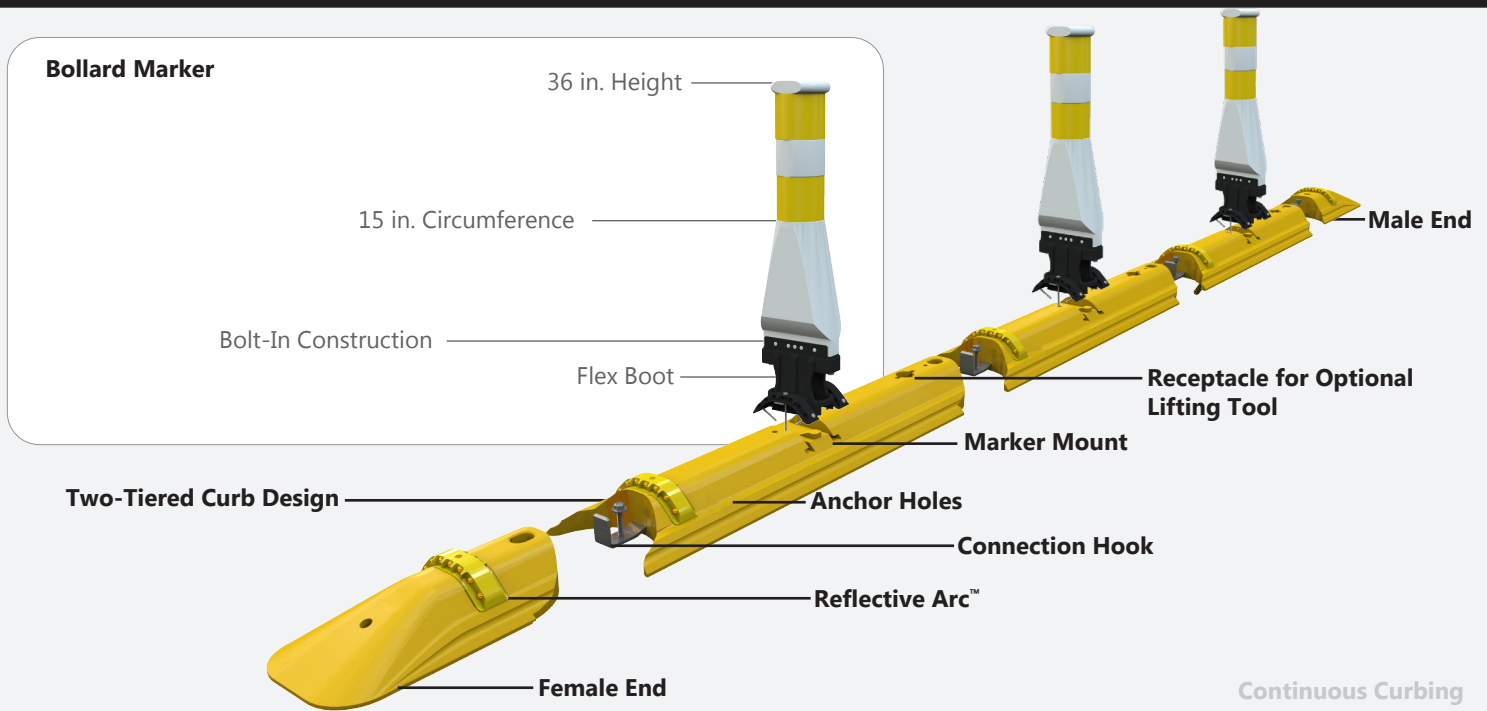

Continuous Curbing

Curb Height

3 1/2 in. (89 mm)

Male End Length (PT# L62)

18 in. (457 mm)

Curb Length (PT# L60)

40 in. (1016 mm)

Female End Length (PT# L61)

18 in. (457 mm)

Max. Installed Curve Radius

38 ft. (11.6 m)

Available Colors

Yellow, White

BIG BOLLARD™

Combined Marker & Curb Height

39 1/2 in. (1003 mm)

Width

8 5/8 in. (219 mm)

Depth

4 3/4 in. (121 mm)

Bollard Circumference

15 in. (381 mm)

Available Colors

Yellow, White

Part Number

L125SHM

Performance

MASH / NCHRP 350 Category

Category III

Anchored Performance

TL-3

Semi-Anchored Performance

TL-3

Unanchored Performance

TL-3

QWICK KURB®, Inc.

1916 US 41 South • Ruskin, FL 33570 • (813) 645-5072

www.qwickkurb.com

General details for QWICK KURB Systems are subject to change without notice to reflect improvements and upgrades. Always refer to the installation manual for details and cautions.

Additional information is available from QWICK KURB, INC.

© QWICK KURB, INC.

QWICK KURB®
CHANNELIZING SYSTEMS

